


ALL-IN-ONE HARDWARE + SOFTWARE SOLUTION





The system is connected to the audio conferencing system over IP and receive in real time the speaking information.



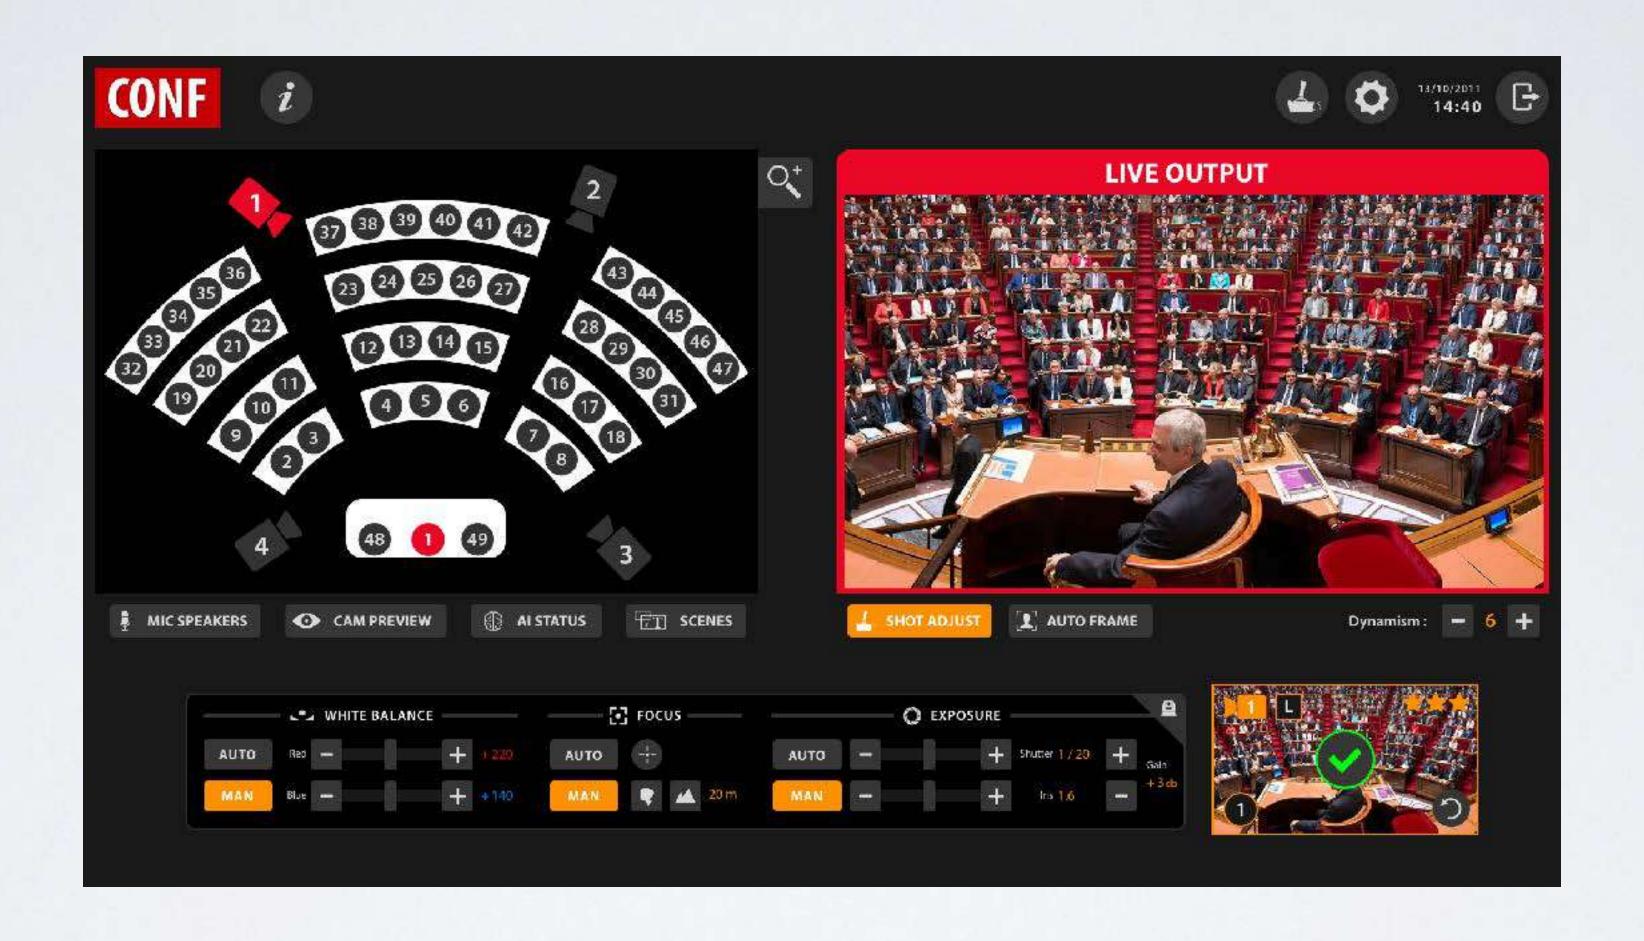

Each microphone is covered by different angles of shots with the PTZ cameras installed in the conference room.



Depending of the speaking situation, the Artificial Intelligence of filming chooses the right shot.

The video filming is rich and dynamic. Speaker titling is automated also.

You can define banks of presets to have a special bunch of angles depending of the show.








VIDEO FILMING SEMI AUTOMATED

At any time, you can take control of the speaker video coverage by clicking on a microphone.

The Al turns into pause mode and will provide the shots that match to it.

You also can adjust a shot during the live session.

That is the SEMI-AUTO mode.

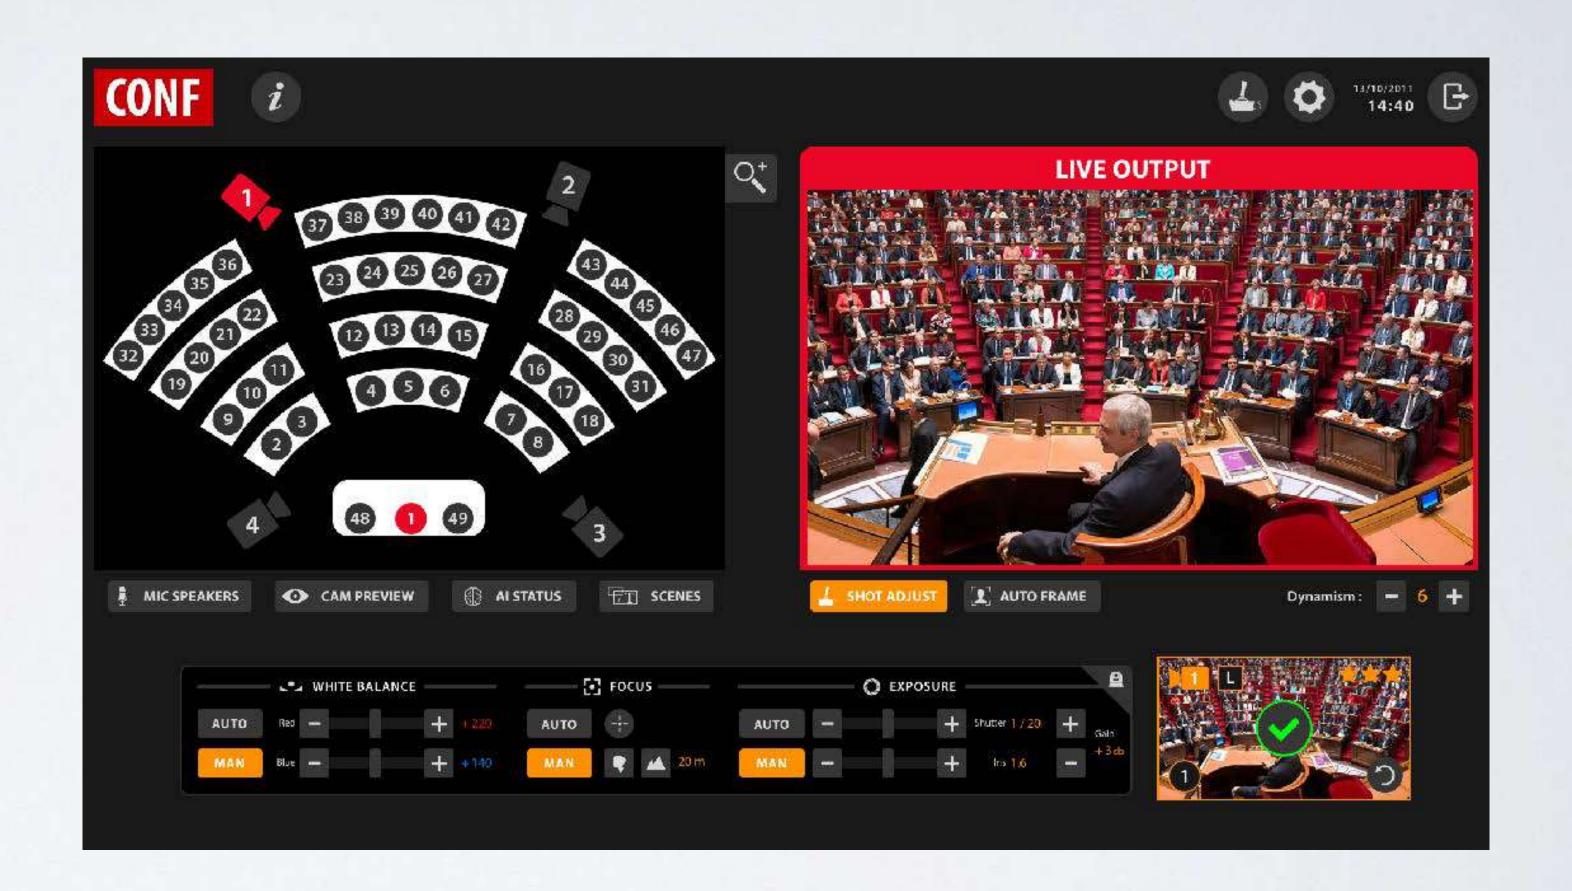


VIDEO FILMING MANUAL

With STUDIO add-on, at any time, you can switch to MANUAL mode to have a complete control of the video filming.

This is useful for musical live session or big shows with dedicated video human ressources.




GRAPHICS AUTOMATION

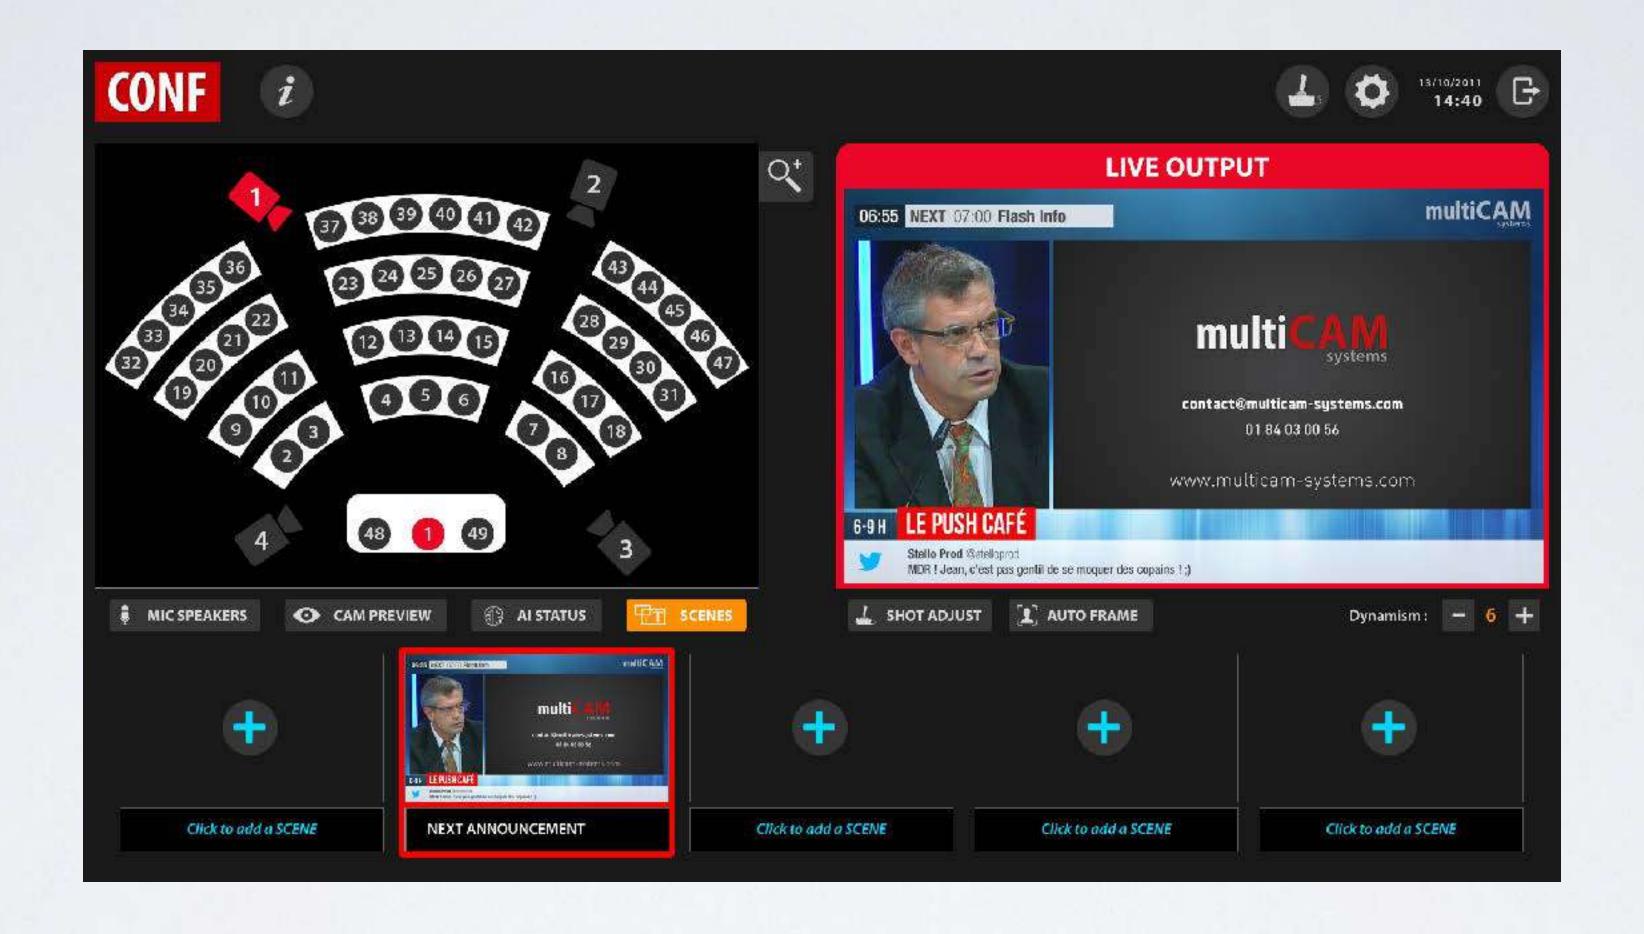


You can create your custom graphic scenes (panels, PiP, Medialist, etc...) and store to one of the 5 available slots.

RECORDING, LIVE STREAMING & PODCASTING

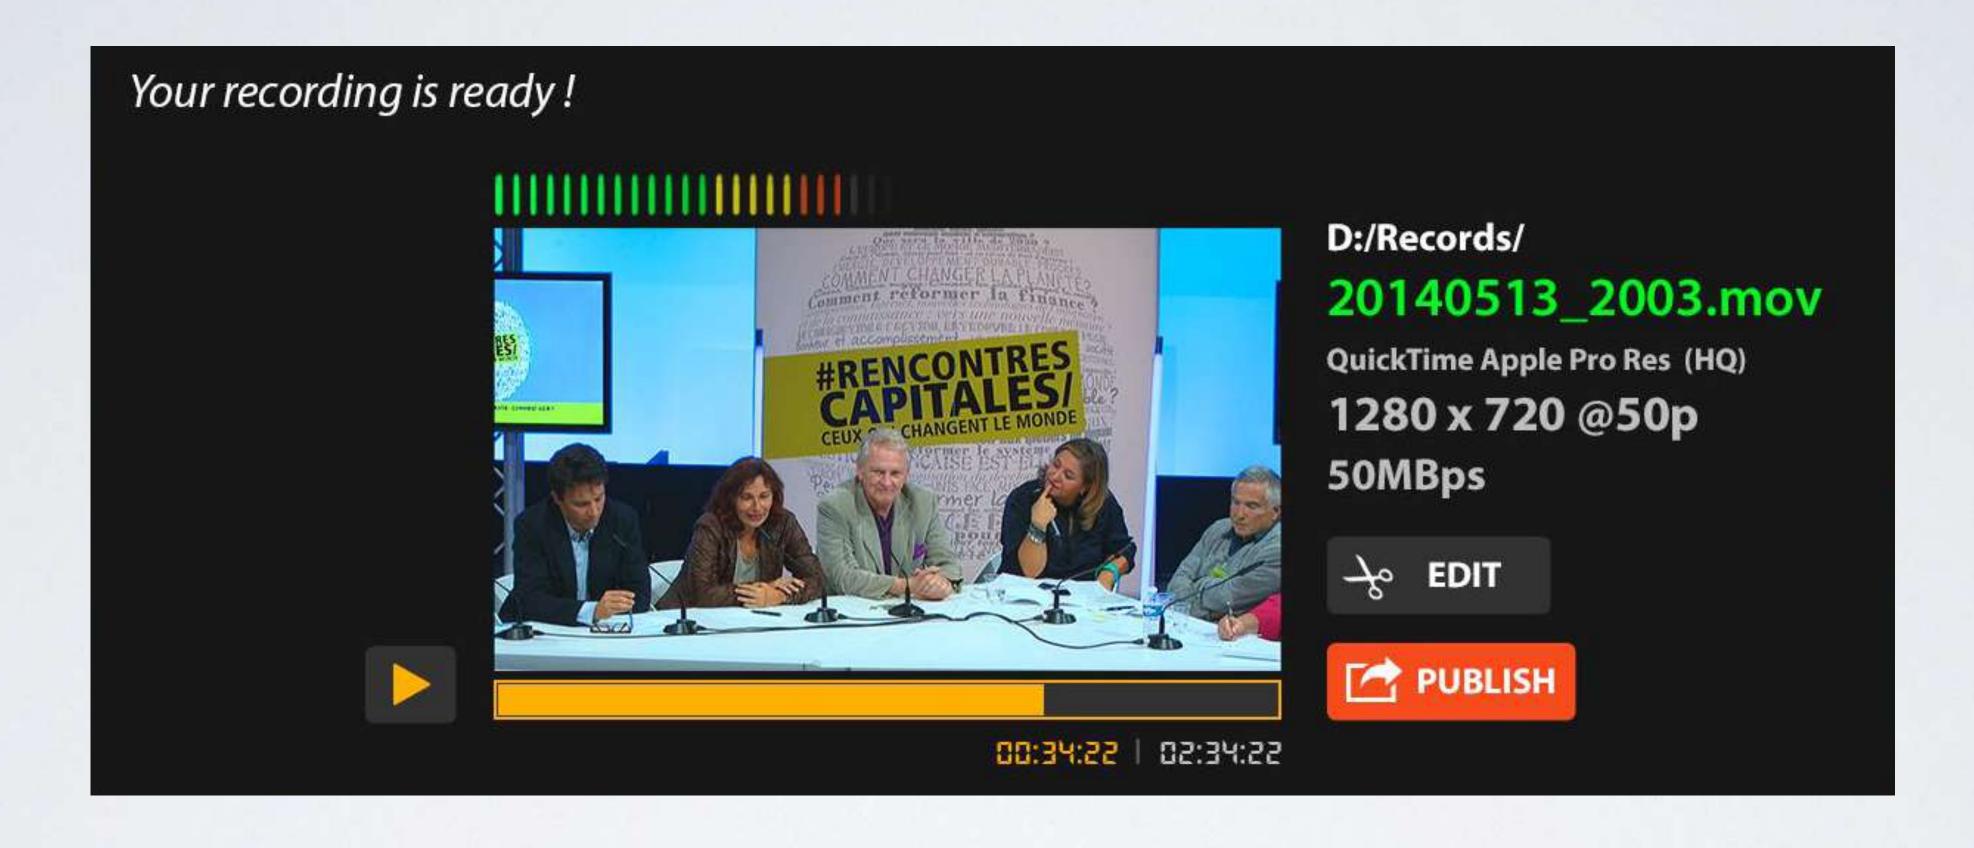

After live session recording, the video publication can be automated according to your specified broadcasting Workflow.

RECORDING, LIVE STREAMING & PODCASTING

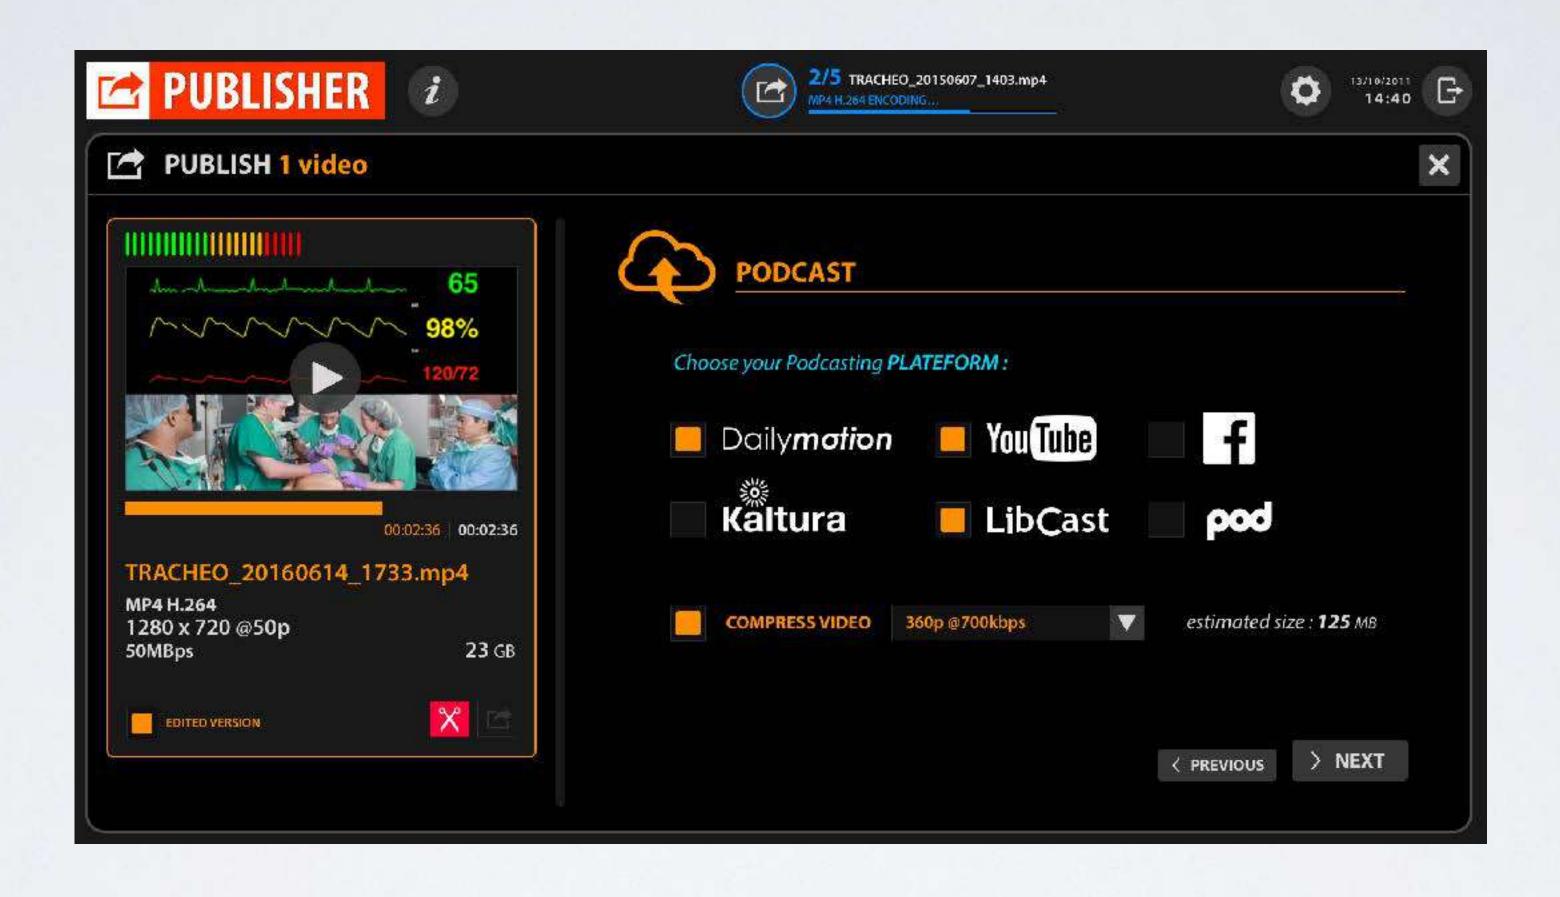


Multicam Systems are compatible with the major video plateform.

We are compatible with Facebook Live!

It manages FTP uploading also.



EXTERNAL CONTROL OF THE SYSTEM

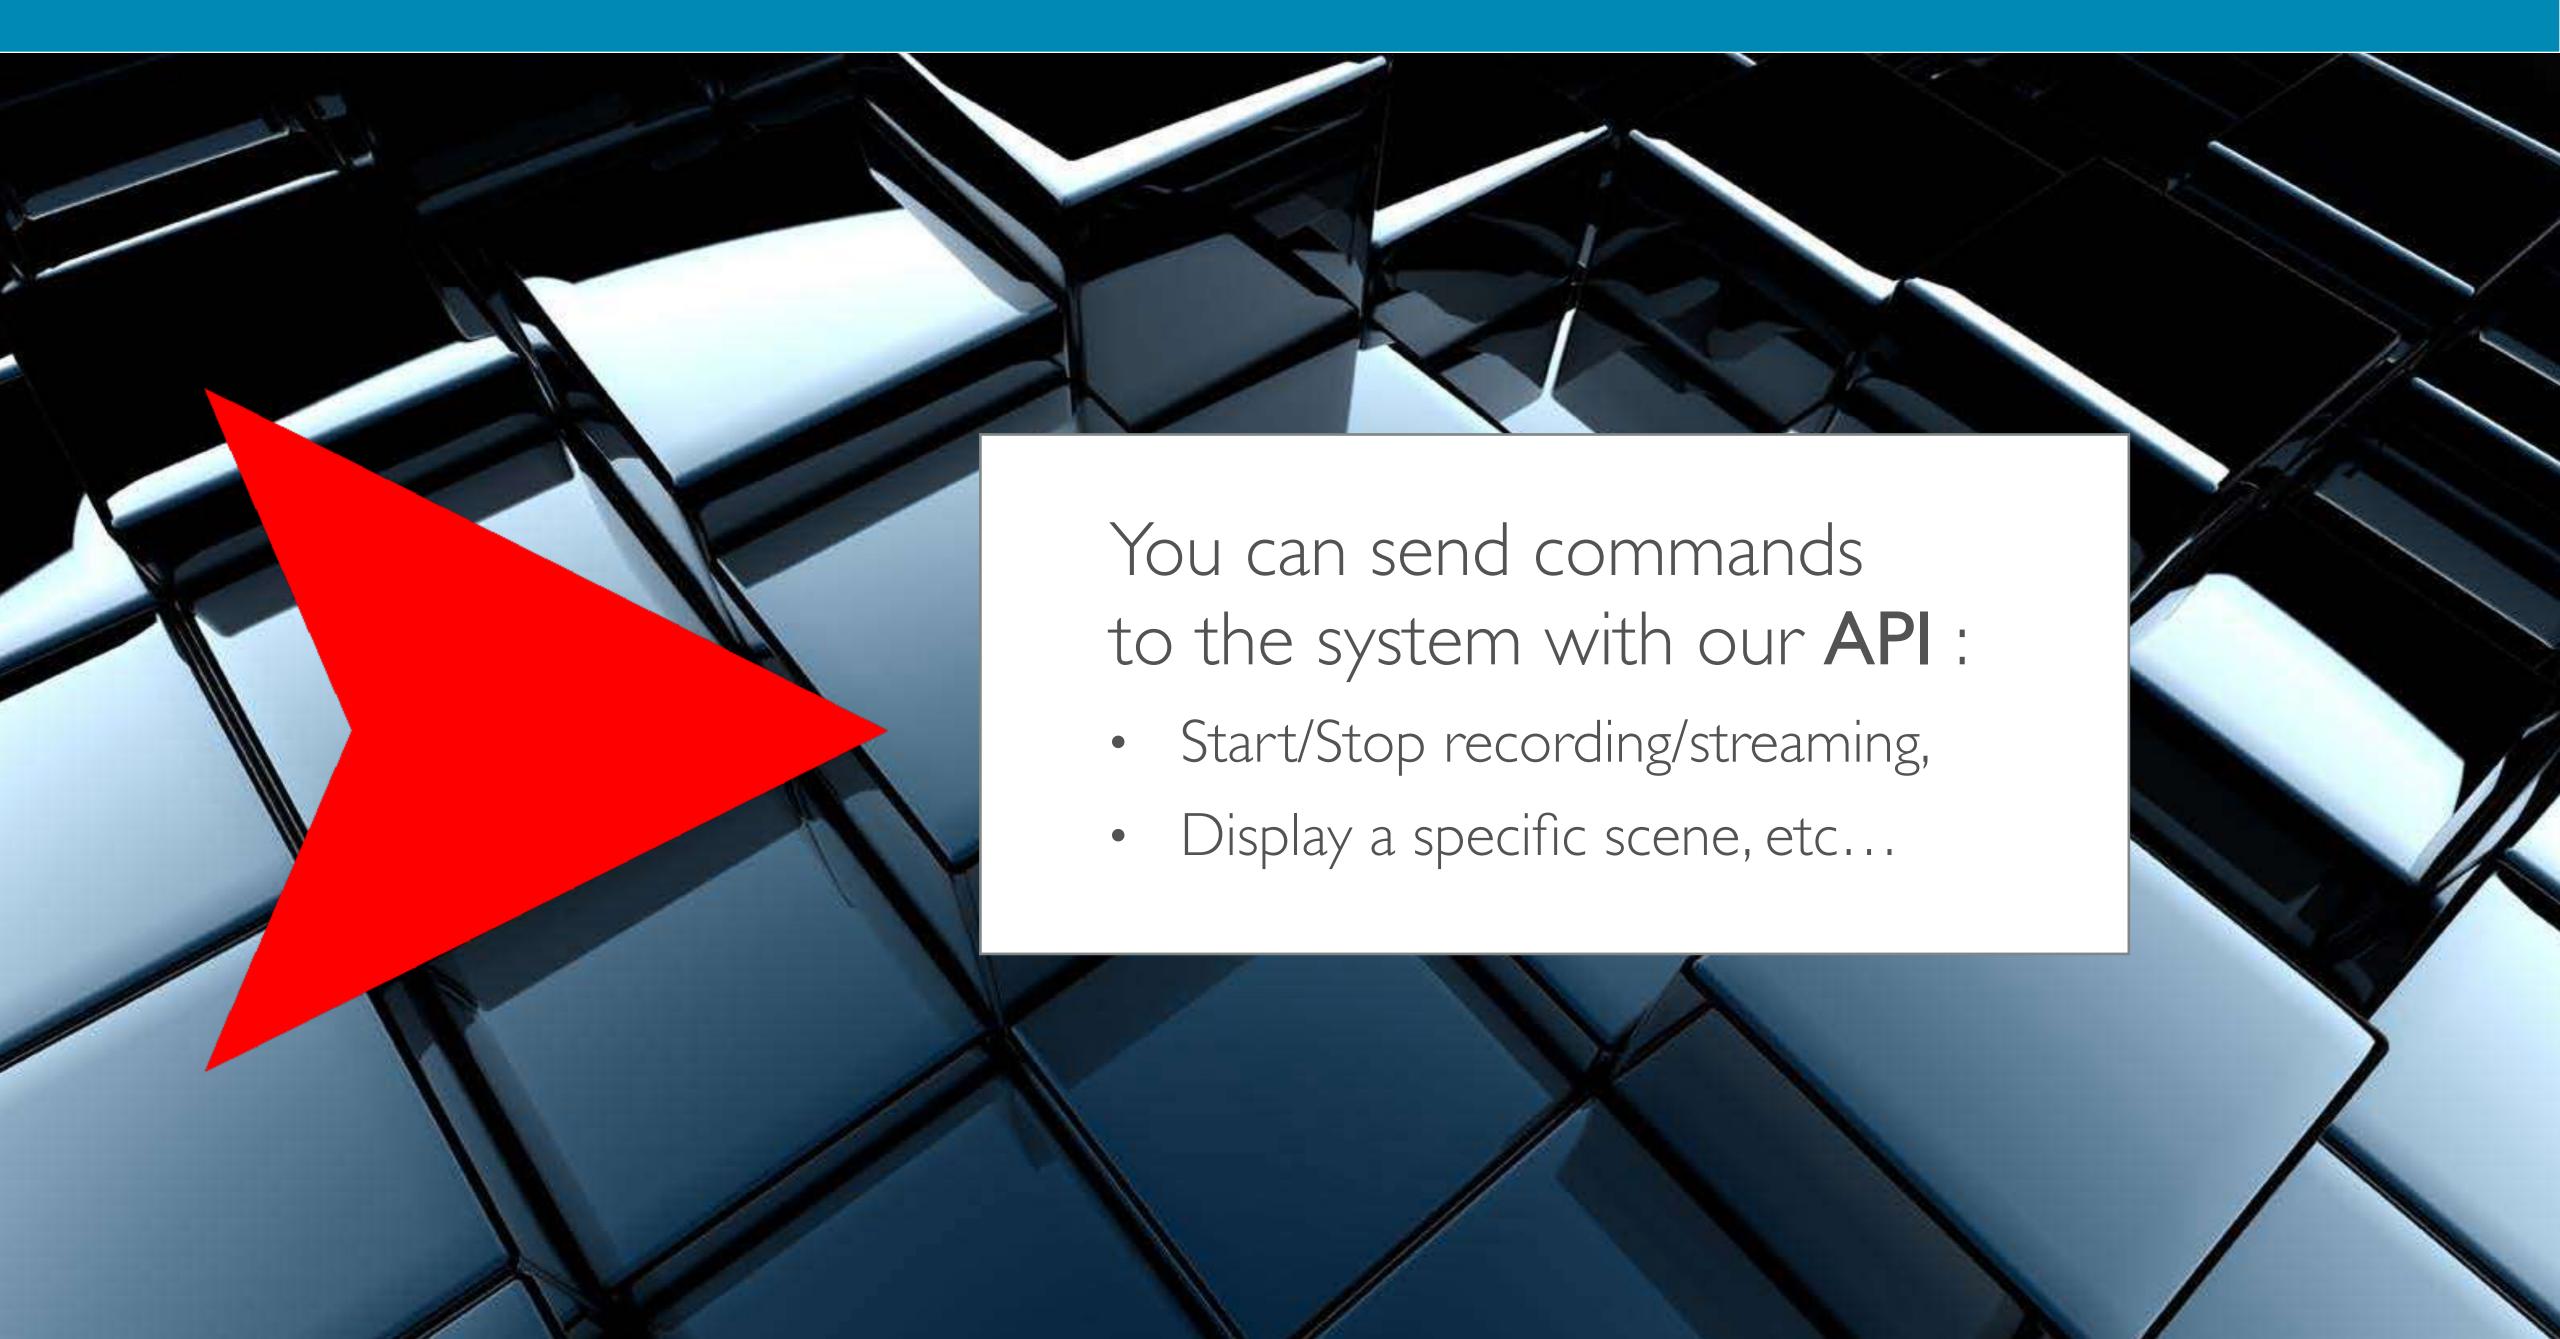

FLEXIBLE INTEGRATION



The standard CONF system is dedicated for 5 cameras inputs.

If you need more video inputs, we recommend the use of a BlackMagic smart videoHub that can grab **up to 40 cameras**.

This external device help us also to manage multiple rooms with just one system.

MULTIPLE OUTPUTS

The standard CONF system has HDMI + HD-SDI outputs.

You also can stream over the local ethernet IP the live output to any other computer with NDI technology.

With this feature, it is very easy to display the live program to a set of TVs.

It also can be used to ingest the output of a Multicam system to another.



FULLY AUTOMATED CONFERENCE CAPTURE